

VC-A70H

Lumens First 4K Ultra HD PTZ Camera

Key Features

- 4K UHD with 30 fps and 1080p with 60 fps
- 12x optical zoom
- 74 degrees Horizontal Field of View (HFoV)
- Built-in tally light
- HDBaseT interface carries power, video and control through one CAT5e/6 cable
- 128 preset positions



Color Options: Black / White

Applications



Education & Training



Lecture Recording



IMAG



House of Worship & Event



Broadcasting



Conference Room

+27 (0) 11 770 9800
SALES@ELECTROSONIC.CO.ZA


33 LILY AVENUE, NORTHCLIFF, JOHANNESBURG,
SOUTH AFRICA 2195

WWW.ELECTROSONIC.CO.ZA

Product Specifications

Sensor	1/2.3" 9MP CMOS	Aperture	F1.8~F2.0
Video Output	3840 x 2160p 29.97 / 25 fps 1080p 59.94 / 50 fps 1080i 59.94 / 50 fps 720p 59.94 / 50 fps NTSC / PAL	Tally Light	Yes
Optical Zoom	12x	PoE	Yes (IEEE802.3af)
Clear Image Zoom	1.67x (4K:20x) 2.0x (1080P:24x)	Camera Control Interface	RS232C / RS422
Digital Zoom	12x	Camera Control Protocol	VISCA, PELCO D
Video Output Interface	HDBaseT, HDMI	Minimum Illumination	3.0 lux (F1.8, 50 IRE, 30 fps)
Horizontal Viewing Angle	74°	Minimum Object Distance	T:150 cm W:1 cm
Panning Angle	-170° ~ +170°	Gain Control	Auto/Manual
Tilting Angle	-30° ~ +90°	White Balance	Auto, Indoor, Outdoor, One-Push, Manual
Preset Positions	128	Exposure Control	Auto, Manual
Panning Speed	300°/sec	Focus System	Auto, Manual
Tilting Speed	300°/sec	WDR	Yes
Video S/N Ratio	> 50dB	Image Flip	Yes
Shutter Speed	1/1~1/10,000	3D NR	Yes
Focal Length	3.9 mm ~ 46.8 mm	Dimensions	174 x 170.2 x 186.8 mm (6.9" x 6.7" x 7.4")
		Weight	2.0 Kg

I/O Connections

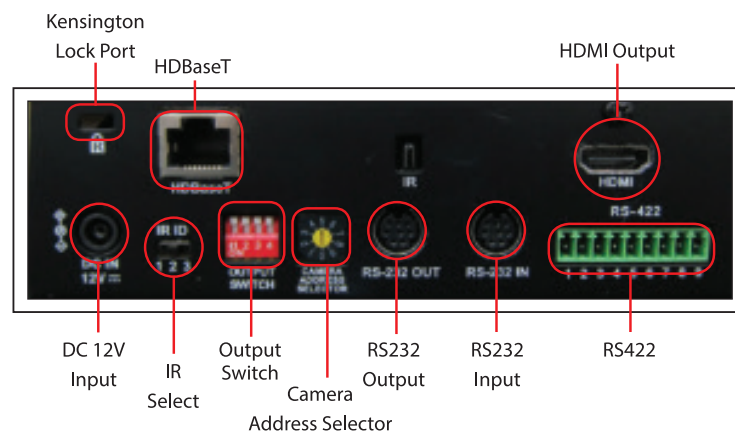

Accessories

- VISCA cable extender (VC-AC07)
- Wall mount for VC-GXX and VC-AXX cameras (VC-AC08)