


We cover you!

MR3 saddle roofs

- MR3 Saddle Roof structure for temporary events
- MT2 self-climbing towers upto 12,5 m high (41.01 ft) with M520 main grid
- various standard sizes and optional front cantilever available
- fast connection for quick, simple and secure assembly
- supplied complete with internal wind bracing wires & connection accessories
- full structural calculation report & build manual available
- PVC roof colour and side walls options
- integrated tower base / stage components available
- PA wing options available on request

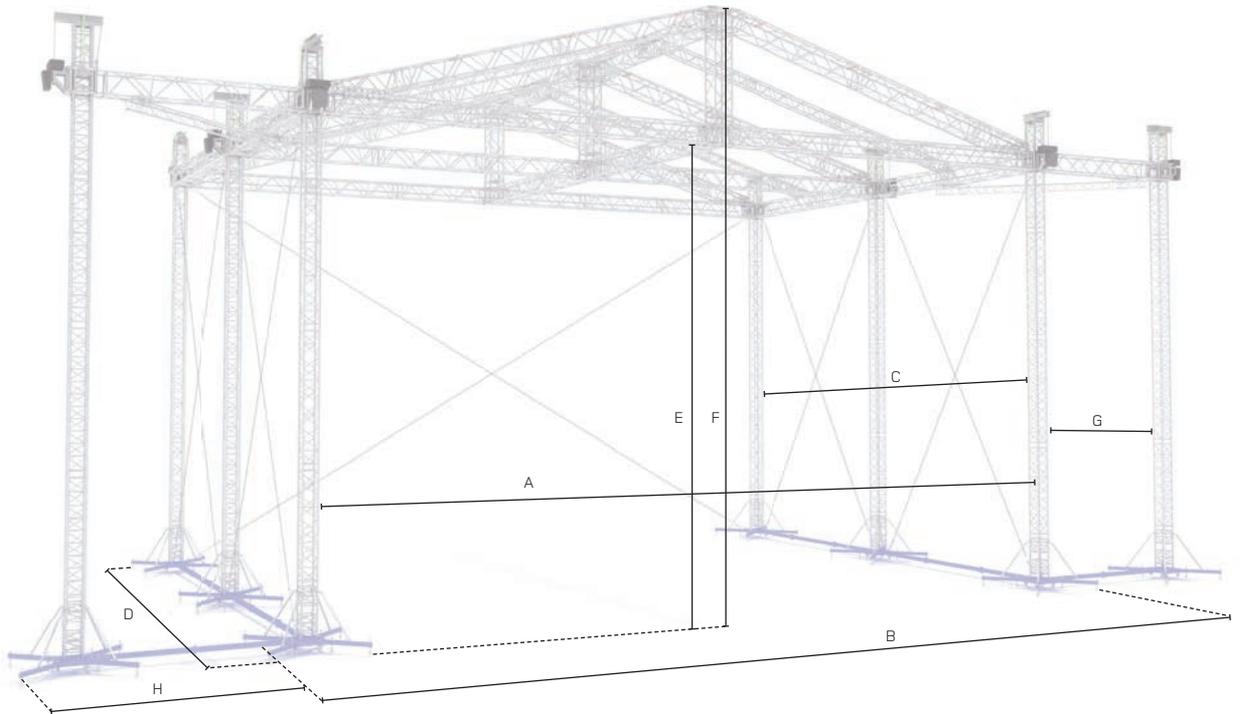

TECHNICAL SPECIFICATIONS

Dimensions	Stage size >		20x14 m	65,62x45,93 ft	18x14 m	59,06x45,93 ft		
	A	Internal width	20,53 m	67.34 ft	18,53 m	60.79 ft		
B	Overall external width	23,15 m	75.95 ft	21,15 m	69.39 ft			
C	Internal depth	14,80 m	48.56 ft	14,80 m	48.56 ft			
D	Overall external depth	16,65 m	54.63 ft	16,65 m	54.63 ft			
E	Clearance	11,50 m	37.73 ft	11,50 m	37.73 ft			
F	Overall height	15,02 m	49.28 ft	15,02 m	49.28 ft			
G	PA wing - internal width	4,31 m	14.14 ft	4,31 m	14.14 ft			
H	PA wing - overall external width	4,71 m	15.45 ft	4,71 m	15.45 ft			

LOADING CAPACITY

Loading capacity	Stage size >		20x14 m	65,62x45,93 ft	18x14 m	59,06x45,93 ft		
	Main grid	Uniformly distributed (UDL)	7420 kg	16344 lbs	7791 kg	17161 lbs		
Point loads		7500 kg	16520 lbs	7875 kg	17346 lbs			
PA wing	Central Point load (CPL)	1500 kg	3304 lbs	1500 kg	3304 lbs			
* See structural report for exact load positioning								



OPERATIONAL SPECIFICATIONS

Design standards	<p>DIN EN 13814 (2005) DIN 1055-4 DIN 4113 DIN 18800</p> <p>• All our structures are standard produced under EN 1090 EXC2, include necessary guy wires, instruction manual and engineering report</p>	<p>Fairground and amusement park machinery and structures Actions on structures / wind Design of aluminium structures Design of steel structures</p>
Wind management	<p>In service * Calculations based on 100% closed side canopies * Side canopies to be removed above this wind speed if not considered</p> <p>Out of service Training recommended</p>	<p>17,8m/s - 64km/h - 40mph (Max. gust windspeed) 27,5m/s - 100km/h - 62mph (Max. gust windspeed)</p>
Ballast	<p>Can vary from 3900kg / 8590lbs up to 10400kg / 22907lbs per tower and depends on:</p> <ul style="list-style-type: none"> • If tower bases are interconnected or free-standing • Layout of canopies • Self-weight of load or interconnected stage is considered (Might be deducted from ballast under certain conditions) • Friction material used between screw jacks, padding and sub soil 	
Canopy & sidewalls	<p>B1 fire retardant canopy on request, kedders profiles optional Silvergrey; other colors or inside black on request B1 fire retardant side nets in compliance with latest Eurocodes</p>	
Customized	<p>Customisation (i.e. truss configuration, alternative dimensions, roof adjustability) on requirement</p>	

TRANSPORTATION DATA

	Stage size	20x14 m	65,62x45,93 ft	18x14 m	59,06x45,93 ft	
Self-weight	* Exact self-weight depends on configuration	7300 kg	16079 lbs	6980 kg	15374 lbs	
Transport volume	* Packed in carton boxes and bubble foil	80 m ³	2825 ft ³	70 m ³	2472 ft ³	